

鋼索簾布輸送帶


STF steelcord conveyor belts



SWR

三五橡膠廠股份有限公司 榮譽出品
SAN WU RUBBER MFG. CO., LTD.

信賴的標誌




SWR

三五牌鋼索簾布輸送帶，是採用比利時BEKAERT公司開發成功的FLEXIMAT® Impact Metal Weft鋼索簾布製成，較傳統式的鋼索輸送帶更能發揮鋼索輸送帶的優點。傳統的鋼索輸送帶僅有單經向(Warp/Single)鋼索，由於沒有緯索，僅賴橡膠不足以耐撕裂切割，經常有割裂事故發生。


三五牌鋼索簾布輸送帶所使用的IW鋼索簾布，以化纖索為綁紗將經緯向的鋼索固定，採用直經織法，故IW鋼索簾布仍保持鋼索(Steel Cable)0.3~0.5%的低初期伸長率特性。輸送帶最大寬度：2000mm。

STF Steelcord conveyor belt is manufactured with Fleximat® Impact Metal Weft, which is a fabric consisting of brass coated steel warp and weft, both two are held together with RFL treated nylon yarns which are warping binder. The outstanding merits of SAN WU'S STF Conveyor Belt are, longitudinal cutting resistance, high transversal and longitudinal flexibility, low elongation and single ply construction. Belt Max, width: 2000mm.

鋼索簾布輸送帶 STF CONVEYOR BELT

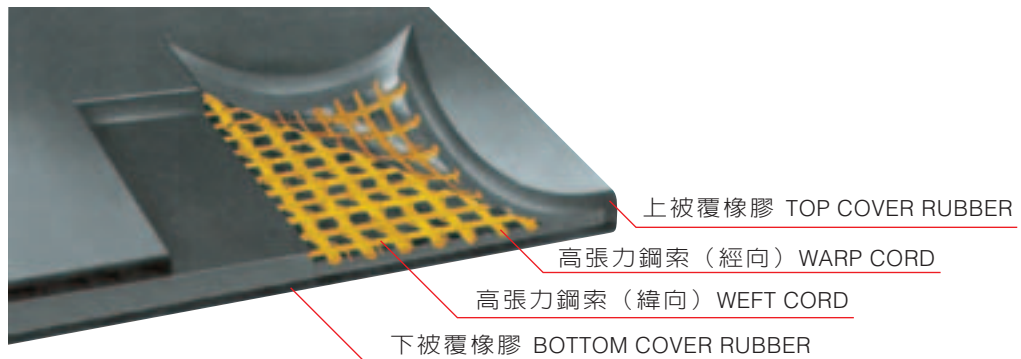

鋼索簾布輸送帶基本構造 Construction OF STF CONVEYOR BELT

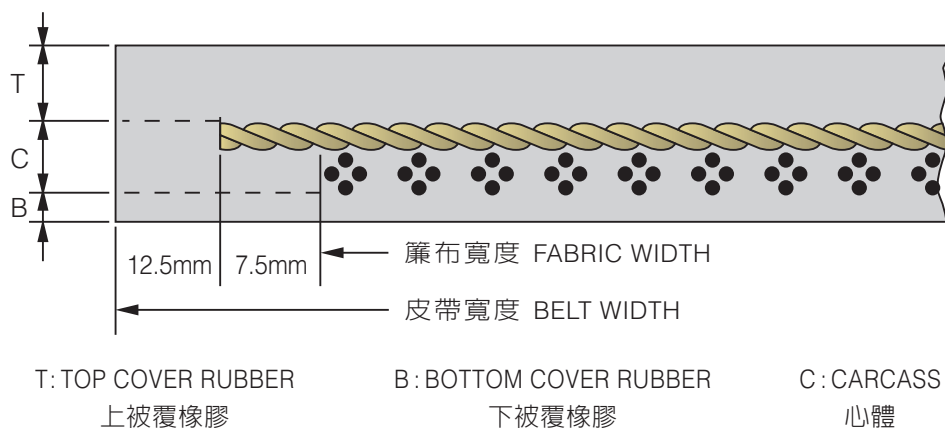

鋼索特性 Description

Fleximat® metal weft 是一種由鍍上黃銅之經緯向鋼索編織成品

Fleximat® metal weft is a fabric consistion of brass coated steel cord warp and weft.

經索（E索）為通過以下測試之特殊鋼索

圖1. 適應壓縮情形。

圖2. 適度的伸長性。

圖3. 良好的橡膠密著性。

緯索具高的斷點延伸，能增進皮帶之撕裂強度及動力吸收能力，扮演著抵抗割裂，撕裂的地位。

Special steel cords (E-cords) are used giving:

- adapted compression behaviour(fig. 1);
- favourable elongation (fig. 2);
- excellent rubber penetration (fig. 3).

The weft cords have high breaking elongation which improves the tear strength and energy absorbing capability of the belts.

The weft steel cords act as a barrier to ripping and tearing forces.

fig. 1

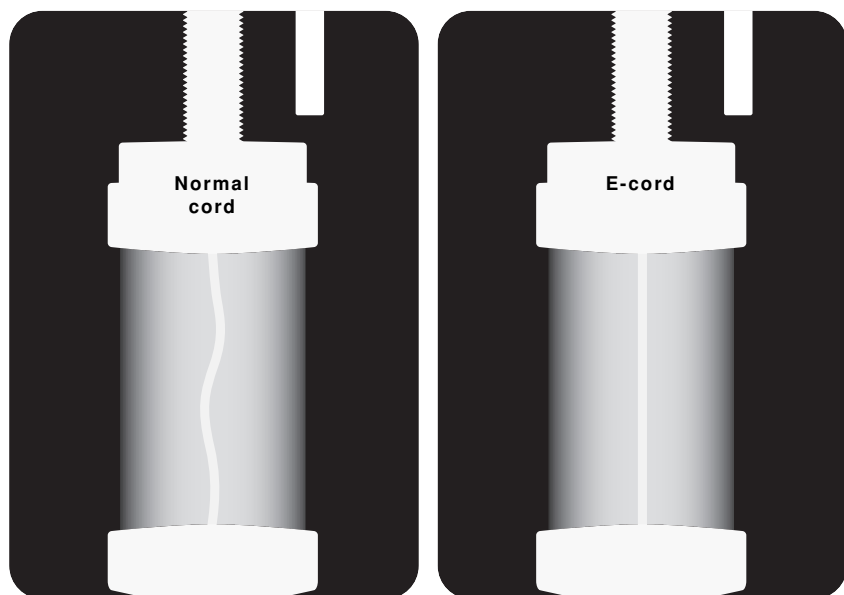


fig. 2


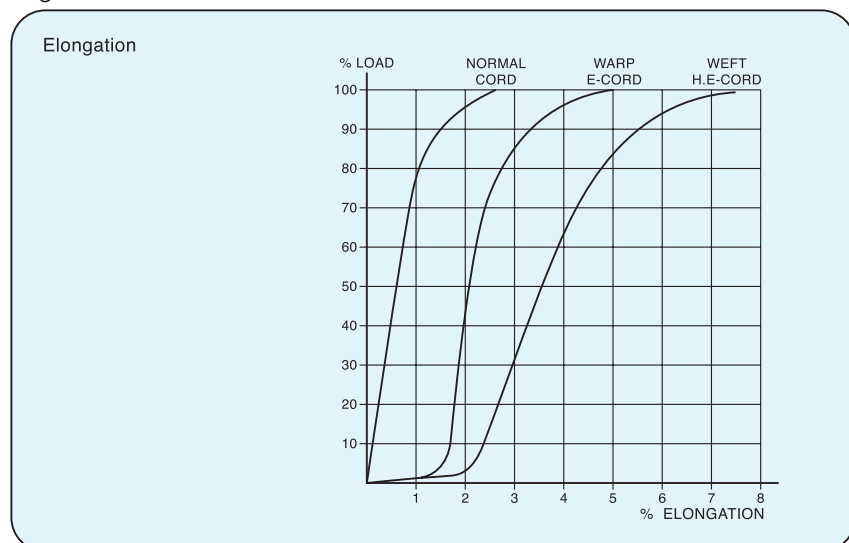


fig. 3




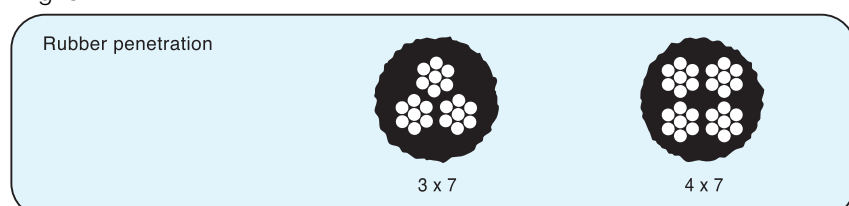

SWR

三五牌鋼索簾布輸送帶製造流程


STF CONVEYOR BELT MANUFACTURING PROCESS

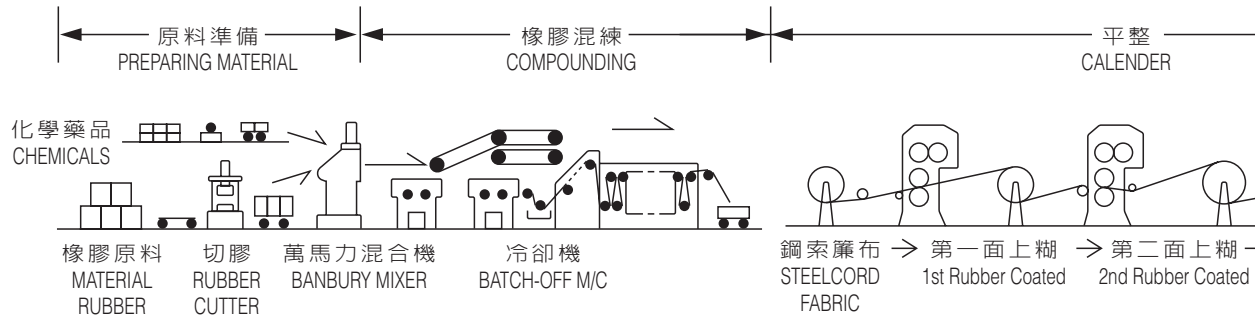

心體強度

STF Carcass Strenght (IW Type)

Belt range 鋼索輸送帶型別		STF (IW)	350	500	630	800	1000	1250	1400	1600
Strength 抗拉強度	Warp N/mm 經向(Kgf/cm)	350 (360)	500 (510)	630 (640)	800 (820)	1000 (1020)	1250 (1275)	1400 (1427)	1600 (1630)	
	Weft N/mm 緯向(Kgf/cm)	90 (91)			125 (127)		175 (178)			
Fleximat 鋼索簾布	Mass 重量Kg/m ²	1.85	2.45	2.95	4.15	5.00	6.35	7.05	7.90	
	Thickness 厚度mm	3.2			4.5		6.0			
WARP CORD 經向鋼索	DIAMETER 直徑mm	2.0			2.85		3.9			
	BREAK. LOAD 斷點強度N	3075			5600		9600			
	BREAK ELONG 斷點延伸率%	5								
	PITCH 間距mm	8.33	5.81	4.63	6.67	5.38	7.04	6.25	5.50	
	DENSITY 密度cords/m	120	172	216	150	186	142	160	182	
WEFT CORD 緯向鋼索	DIAMETER 直徑mm	1.52			2.10		2.40			
	BREAK LOAD 斷點強度N	1720			2900		3775			
	BREAK ELONG 斷點延伸率%	7.5								
	PITCH 間距mm	17.5			20					
	DENSITY 密度cords/m	57			50					

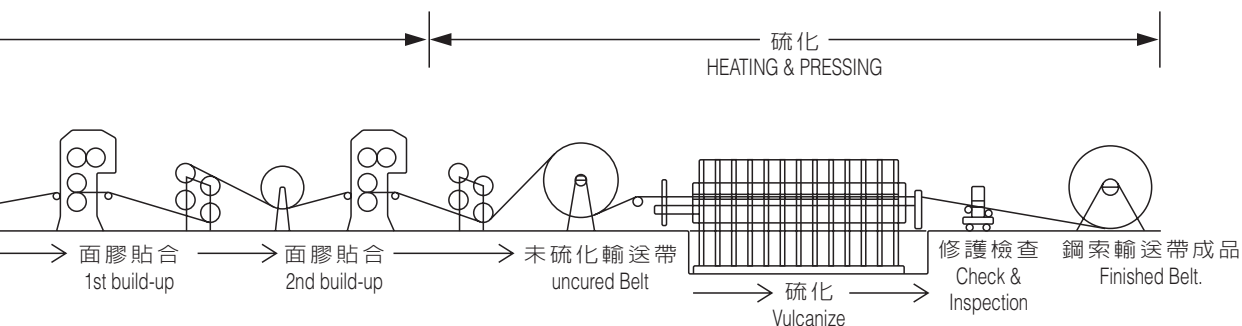

心體強度

STF Carcass Strength(IWR Type)

Belt range 鋼索輸送帶型別		STF (IWR)	630R	800R	1000R	1250R	1400R	1600R	1800R	2000R
Strength 抗拉強度	Warp N/mm 經向(Kgf/cm)	630 (640)	800 (820)	1000 (1020)	1250 (1275)	1400 (1427)	1600 (1630)	1800 (1836)	2000 (2040)	
	Weft N/mm 緯向(Kgf/cm)	200 (203)								
Fleximat 鋼索簾布	Mass 重量Kg/m ²	3.45	4.35	5.20	6.40	6.90	7.90	9.10	9.80	
	Thickness 厚度mm	5.0	5.6		6.4		7.2			
WARP CORD 經向鋼索	DIAMETER 直徑mm	3.0	3.6		4.4		5.2			
	BREAK. LOAD 斷點強度N	9700	13500		19800		26700			
	BREAK ELONG 斷點延伸率%	2.5								
	PITCH 間距mm	14	15	12	14	13	15	13	12	
	DENSITY 密度cords/m	71.4	66.7	83.3	71.4	76.9	66.7	76.9	83.3	
WEFT CORD 緯向鋼索	DIAMETER 直徑mm	2.10								
	BREAK LOAD 斷點強度N	2900								
	BREAK ELONG 斷點延伸率%	7.5								
	PITCH 間距mm	14								
	DENSITY 密度cords/m	71.4								

如有特殊規格請洽本公司

Specific specifications subject to customer's required.




SWR

輸送帶各種心體材料初期伸長率比較表 CARCASS-ELONGATION

心體材料種類 Type	IW IWR STEEL	AR ARAMID	NN NYLON	EP.TN POLYESTER	COTTON RAYON	VN VINYLON
初期伸長率% Initial Elongation	0.3~0.5	0.5~1	2.5~3.5	2.5~3.5	3~4	3~3.5

應力－伸長率曲線圖： Stress-Strain Chart

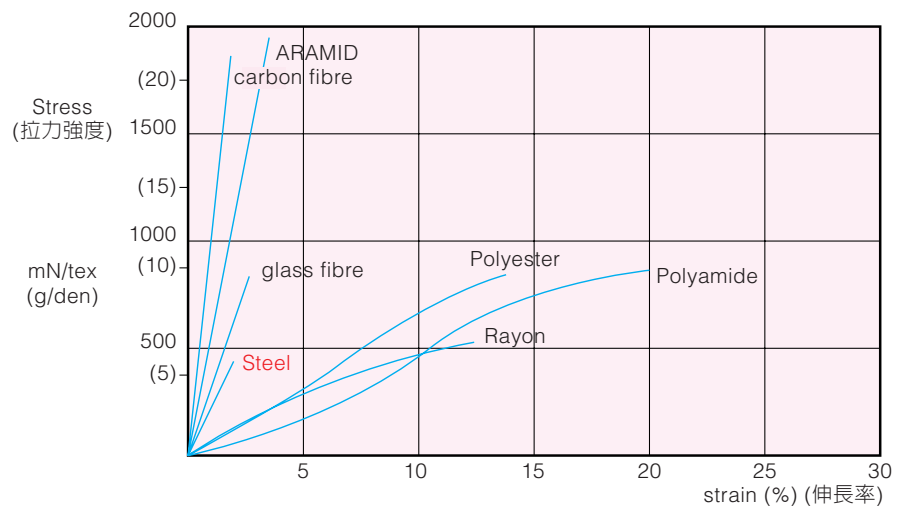










被覆橡膠之性能 Characteristics of cover rubber

Test item 試驗項目		Performance of cover rubber 被覆橡膠之性能	
		A	S
Tensile test 抗拉試驗	Tensile strength kgf/cm ² (MPa) 抗拉強度	140 (13.73) min	180 (17.65) min
	Elongation (%) 伸長率	400 min	450 min
Aging test 老化試驗	Variation percentage of tensile strength (%) 抗拉強度之變化率	±25 以內	
	Variation percentage of elongation (%) 伸長率之變化		
Abrasion test 磨耗試驗	Abrasion volume 磨耗量 (mm ³)	150 max.	200 max.
Ozone deterioration test 耐臭氧試驗		No generation of cracks 無龜裂	

適用最小輪經 Recommended min.pulley diameters

型別 TYPE			驅動輪、頭輪 Drive pulley. Head pulley	配重輪、尾輪 Take-up pulley. Tail pulley	邊側輪 Snub pulley
IW350	IW500	IW630	355	315	250
IW800	IW1000		500	400	315
IW1250	IW1600		630	500	400
IW630R			600	500	350
IW800R	IW1000R		800	650	500
IW800R	IW1400R		950	750	550
IW1600R	IW1800R	IW2000R	1050	850	650

鋼索簾布輸送帶之特點 Characteristics of STF CONVEYOR BELT

 心體單層結構 single ply construction	 耐衝擊性佳 good impact resistance
 鋼索與橡膠結合性優 excellent chemical bond between steel cord and rubber	 避免層間脫離 ply separation avoided
 鋼索強度穩度性優 strength stability and excellent fatigue properties of steel cord	 耐撕裂性增強 strongly increased ripping and tear resistance
 耐熱物“燒透” suited for hot material transport no "Burn Through" trouble	 張緊裝置費用低 low cost (smaller) take-up units
 凹槽性良好 high troughability high transversal flexibility	 曲撓性佳，可使用較小帶輪 high longitudinal flexibility small pulleys permitted
 張力固定，運轉時不幌動 constant belt tension if screw tensioning is applied	 接合簡便，修補容易 simple and effective splicing easy belt repairing


· 本型錄數據資料謹供參考，不具保證責任。

· All the information contained in this catalogue is based on reasonable research, but does not guarantee any result.



總公司全貌
FACTORY

ISO-14001/SGS
ISO-9001:2000/CNS 12681
Certificate NO:5XWY008-03



SWR

三五橡膠廠股份有限公司

SAN WU RUBBER MFG. CO., LTD.

總公司 及工廠	彰化縣和美鎮彰美路二段106號	電話：(04)7355142~6	傳真：(04)7353802
台北辦事處	台北市太原路107號3F	電話：(02)25559820	傳真：(02)25567847
台北門市部	台北市太原路107號	電話：(02)25552325~6	傳真：(02)25567847
桃園加工廠	桃園市鹽庫街10號	電話：(03)3262070~2	傳真：(03)3258432
台南營業所	台南市公園路327-1號	電話：(06)2279955~6	傳真：(06)2209610
高雄加工廠	鳳山市鞏汽路9號	電話：(07)7132908	傳真：(07)7719959
花蓮加工廠	花蓮市美工七街4號	電話：(03)8234061~3	傳真：(03)8232386
HEAD OFFICE/106 SEC, 2 CHANG MEI RD., HOMEI, CHANG HWA, TAIWAN, R.O.C			
P.O.BOX NO. 23/118 CHANG HWA. TAIWAN			
TEL:886-4-7355142		FAX:886-4-7353802	
FOREIGN DIV.: TEL:886-4-7361445-6		FAX:886-4-7365900	
E-mail address:sales@sanwu.com.tw		http://www.sanwu.com.tw	